



DESIGN SPECIFICATIONS

- √High quality, reliable, long life and complete power unit.
- √ compact design.
- √Easy start and maintenance possibility.
- √Every generating set is subject to a comprehensive test programme which includes full load testing and checking and proving of all control and safety shut down functions testing.
- √Fully engineered with a wide range of options and accessories: Electrical, mechanical, soundproof canopy and mobile units

**YCW-1250T6 powered by:
YC12VTD1680-D32**

Diesel Genset Features		P.F=0.8 3Phase 60Hz	
Generating Set Performance			
Service		P.R.P	Standby
Rated output	kVA	1250	1375
Active power output※	kW	1000	1100
Rated Speed	r.p.m	1800	
Standard Voltage	V	380/220	
Voltage available	V	480/277-460/265 - 440/254-416/240-240/139-220/127-208/120	

Performance data refer to Standard Reference Conditions of ISO 8528: +25 °C, 100m ALT, relative humidity 30%
 Power reduction acc.to DIN ISO 3046 Standard values: Above 100m ALT approx.1% per 100m. Above 25°C(77°F) approx.4% per 10°C(50°F).
 ※Considering cos phi=0.8

Prime Mover Performance		1800 r.p.m	
SERVICE		P.R.P	Standby
Rated output	KW	1120	1232
Manufacturer		YUCHAI	
Model		YC12VTD1680-D32	
4 stroke Diesel Engine - Injection type		Direct	
Aspiration type		Turbocharged & Intercooled	
Cylinders, number and arrangement		12 -V	
Bore*Stroke	mm	152X180	
Total Displacement	L	39.2	
Cooling system		Water	
Lube oil specifications		Summer: 15W-40 CH-4; Winter: 5W-30 CH-4, 10W-30 CH-4	
Compression ratio		14:1	
Specific fuel consumption(P.R.P)	L/h	≤293.21	
Specific oil consumption(at full load)	%		
Total coolant capacity	L		
Speed governor	Type	HPCR	

① P.R.P. Prime Power - ISO 8528: PRIME POWER is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during a 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.
 ② Max Standby power - ISO 3046 Fuel Stop power: Power available for use at variable loads for limited annual time (500h), within the following limits of maximum operating time: 100% load 25h per year, 90% load 200h per year. No overload available. Applicable in case of failure of the main in areas of reliable electrical network.

Synchronous Generator			
Manufacturer		Guericke	
Model		GRK 1000G4	
Rated output		1000	
Poles	num	4	
Winding Connections (standard)		Star-serie	
Insulation	class	H	
Enclosure(according to IEC-34-5)		IP23	
Phases		3+N	
Voltage Regulaors		A.V.R (MX341B)	
Steady voltage precision		within±1.5% from no load to full loading with cosΦ=0.8-1.0	

※Alternator used by GTL Gensets meet the requirements of following Standard: BS5000, VDE0530, NEMA MG1-32, IEC34, CA C22.2-100, AS1359


Generatong Set Installation Data		1800 r.p.m	
EXHAUST SYSTEM			
Exhaust Gas Temperature at full load	°C		
	°F		
Exhaust gas flow	L/s		
Maximum allowed back pressure	Kpa		
AIR REQUIREMENT			
Air requirement for combustion at 100% load/rated speed	L/s		
	ft3/min(CFM)		
ELECTRIC STARTING SYSTEM			
Starting motor output	kw		
Minimum Recommended Battery Capacity-Cold Soak @ 32°F (to 0°C)	CCA		
Standard Battery Charging System	A		
Auxiliary voltage	V		
LUBRICATION SYSTEM			
Lube oil system including sump, filters, etc.	L		160 - 210

Standard Control Panel -EPmaster EPM7

Protection, distribution, and automatic control panel, which starts the generator set when it detects a mains failure and stops it when the mains is restored with the control unit EPM7. It also starts and stops the group manually via a pushbutton or remote start-up by contact.

It has the following:

- ① Emergency stop push button
- ② Protections:
 - Circuit breaker (preheating resist.) 2P (16 A)
 - Protection fuses for control module
- ③ Voltage & speed trimmers
- ④ Battery charger
- ⑤ DC switch
- ⑥ Working Lamp switch
- ⑦ Distribution: Direct output of the circuit breaker
- ⑧ EPM7 & EPM7+ (cloud monitoring communication)
- ④ control and protection centre

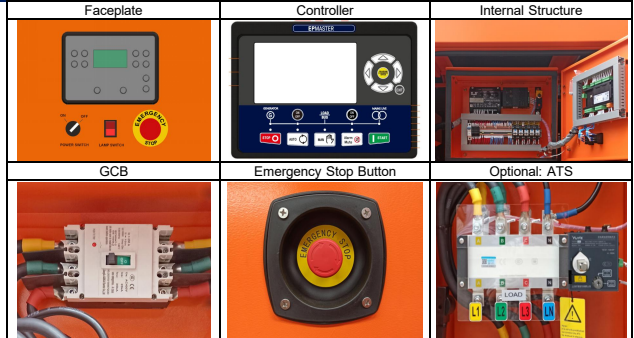

EPmaster EPM7

It has a digital LCD screen, which provides easy reading of the information regarding the Engine, Alternator, Mains and Charging. The controller meets all requirements for Auto Mains Failure (AMF) applications including remote communication and internet control, user configuration and complete genset monitoring and protection.

• READINGS that can be made: Engine: cooling temperature/oil pressure/revolution speed (rpm)/fuel level/battery voltage/battery alternator voltage/operating hours/number of start Alternator: voltages between phases and between phases and neutral/frequency/phase sequence Mains: frequency/voltages between phases and between phases and neutral (L1-N, L2-N, L3-N)/voltages between phases and (L1-L2, L2-L3, L1-L3)/phase sequence	•Protection of the engine and alternator, with the ALARMS activated: Engine: low oil pressure/high coolant temperature/low and high battery Voltage./failure of the alternator to charge batteries /Low fuel level. Alternator: low and high voltage/low and high frequency/overload /short-circuit/ Mains: over and under voltage and loss of phase •Control of the set: STARTS and STOPS the set AUTOMATICALLY when mains failure is detected and when it is restored, respectively. It can also operate MANUALLY and Auto Transfer Switch control	•Other characteristics: Event log, real-time clock, scheduled start & stop generator (can be set as start genset once a day/week/month whether with load or not). Maximum 99 event logs can be memorized. With maintenance function. Types (date or running time) can be optional and actions (never, warning, or shutdown) can be set when maintenance time out. Equipped with CANBUS port and can communicate with J1939 engine. Not only can monitor frequently-used data (such as water temperature, oil pressure, speed, fuel consumption and so on) of ECU machine, but also control starting up, shutdown, raising speed and speed droop via CANBUS port RS485 communication interface enables "Three remote" functions (remote control, remote measuring and remote communication) according to MODBUS protocol. Parameter setting: parameters can be modified and stored in internal FLASH memory and cannot be lost even in case of power outage; most of them can be adjusted using front panel of the controller and also can be modified using PC via USB or RS485 port.
---	--	---

Standard Configuration & Option

Item	Standard	Option
Engine	Standard air filter	Heavy duty air filter
	Standard fuel filter	Air intake shutoff valve chawin type
	Standard oil filter	Intake air heater
	Low coolant level sensor	Oil temperature sensor
	Exhaust gases compensator	Diesel-powered heater
	24V Electrical system	Engine water heater
	Radiator with bloweing fan	
	Electronic governor	
	Sender WT	
	Sender OP	
	Hot components and radiator guards	
Mobile components guards		
Alternator	Self-excited and Self-regulated	Air inlet filter
	IP23 protection degree	IP44/IP54/IP55
	Insulation H class	Space heater/anti-condensation heater
		Environment protection
		Temperature detectors
Electrical system	Battery isolator switch	Parallel operation
	3 poles circuit breaker	Distribution board with sockets kit and power busbar
	Door opening alarm	4 poles circuit breaker
	Battery charger 220-240V	Adjustable ELCB (Earth Fault)
		Grouding rod
Accessories		ATS
	Water separator filter	Diverter valve kit for external fuel tank
	Low fuel level alarm	Automatic fuel refilling kit
	Oil extraction pump	Trailer
	Tool kit for maintenance	Residential silencer
	Voltage/Speed potentiometer	Electric engine fuel heater
	No Expansion tank	Expansion tank for coolant water

Generating Set transport data

Dimensions(Open Skid Type) With Standard Fuel Tank



- √ The complete gen-set is mounted on whole on a heavy-duty fabricated, steel base frame.
- √ Antivibration pads are fixed between the engine/ alternator feet and the base frame ;
- √ Base frame design incorporates an integral fuel tank.
- √ The generating set can be lifted or carefully pushed / pulled by the base frame ;
- √ Dial type fuel gauge and drain plug on the fuel tank;
- √ Forklift pockets within base frame (up to 500kVA);

Over All Size

Length	mm	4550
Height	mm	1800
Width	mm	2400
Shipping Volume	m3	19.66
Dry Weight	Kg	7300
Fuel Tank Capacity	L	1000

Dimensions(Silent Type) With Standard Fuel Tank



- √ All canopy parts are designed with modular principles.
- √ Without welding assembly
- √ All metal canopy parts are painted by electrostatic polyester powder paint.
- √ Doors on each side
- √ Thermally insulated engine exhaust system.
- √ Emergency stop push button outside of canopy.
- √ Easy maintenance and operation.

Over All Size

Length	mm	6069
Height	mm	2438
Width	mm	2591
Shipping Volume	m3	38.34
Dry Weight	Kg	13000
Fuel Tank Capacity	L	1000



Tongan Industry Zone, Tongan District, Xiamen, China | Tel: +86 0592 7196398 | Fax: +86 0592 7898663 | E-mail: vicsun@cngtl.com | www.cngtl.com

